

# Rear End Order Form

Type of Rear End Dana 60 \_\_\_\_\_ Ford 9" \_\_\_\_\_

Housing Ends \_\_\_\_\_

Axle Spline \_\_\_\_\_

Gear Ratio \_\_\_\_\_ Pro \_\_\_\_\_ Street \_\_\_\_\_

IF 9" Rear What Case Steel \_\_\_\_\_ Alum \_\_\_\_\_

Spool \_\_\_\_\_ Posi \_\_\_\_\_ Locker (9" only) \_\_\_\_\_

Axle Bolt Pattern \_\_\_\_\_


Stud Size 1/2" \_\_\_\_\_ 5/8" \_\_\_\_\_ Screw In

Pinion Offset \_\_\_\_\_ Pinion Offset is the difference between F and G Divided by two

Axle To Axle D \_\_\_\_\_ Driver Side Housing Flange To Pinion Center F \_\_\_\_\_

Housing Width E \_\_\_\_\_ Passenger Side Housing Flange To Pinion Center G \_\_\_\_\_

Axle to Axle measurement doesn't include the thickness of the brake hats

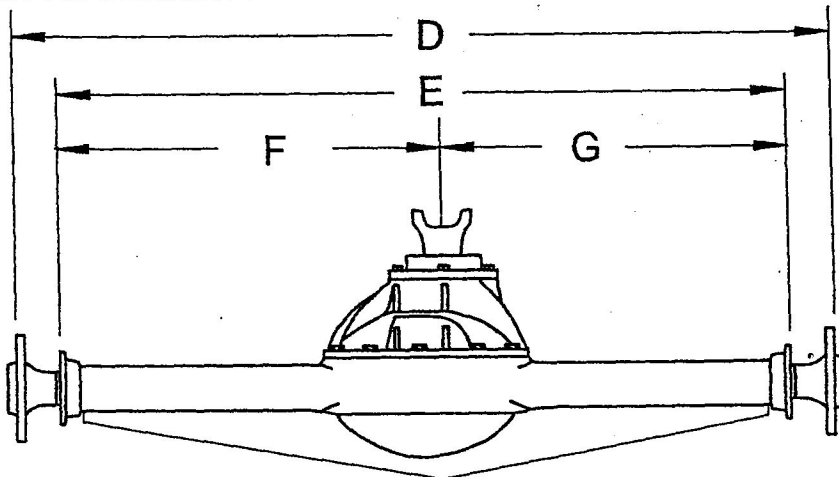

## Bracket Welding

KIT # 3516 \_\_\_\_\_ 3515 \_\_\_\_\_ 3514 \_\_\_\_\_ 3513 \_\_\_\_\_ 3505 \_\_\_\_\_

Outside To Outside Measurement \_\_\_\_\_  
Of The Brackets